



Project: Date:

Prepared By:

Comments



FEATURES

- White regressed baffled trim
- IC rated for contact with insulation and Air Tight to prevent heating and cooling losses
- Dimmable to 10% with approved LED dimmers
- Wet-location rated
- Title 24 Compliant (CRI >90)
- ENERGY STAR®

APPLICATIONS

Conference Room
Medical Office
Office Lobby
Residential
Retail

CERTIFICATIONS

OPTICS

- Frosted white lens
- Regressed reflector

... Visit our website for more information.

TRIM ORDERING OPTIONS

Model Number	Kelvin (CCT)	Watts	Lumens	CRI	Trim Color
RB6WHWH9T1340	4000K	18	1480	93	White Retrofit trim

SPECIFICATIONS

Warranty:	5 Years	Max. Ambient Temp:	45° C	R9-Value:	Beam Angle:	103°
Expected Life:	50,000 hrs	Min. Ambient Temp:	-18° C	Power Factor:	THD:	<20%






Project: Date:

Prepared By:

Comments

DIMMING COMPATIBILITY

February 18, 2016		EV613950 120 V Triac or phase-cut dimmers						
Brand	Type	Series	Model #	Wiring	Version Code	Max # of Luminaires	Min # of Luminaires For Proper Dimming	Dimming Range
Lutron	C.L	Ariadni/Toggler C.L	AYCL-153P	3-Way	T4, T8	7	1	3% - 100%
			TGCL-153P					
		Diva C.L	DVCL-153P					
		Skylark C.L	SCL-153P					
		Skylark Contour C.L	CTCL-153P					
		Lumea C.L	LGCL-153P					
	Maestro C.L	MACL-153M	3-Way	2014	7	1	8% - 94%	
		MSCL-VP153M	single/multi	T2	7	1	8% - 95%	
		MSCL-OP153M	single/multi					
		MRF2-6CL	NA	M6	7	1	8% - 96%	
		Nova T	NTCL-250	single	BR Y02	12	1	3% - 100%
RF C.L	Grafik T	GT-150	single	T6	7	1	7% - 100%	
	Grafik T RF	GTJ 150	single	M6	7	1	7% - 100%	
Leviton	Universal Dimmer	Decora	DSL06-1L	3-Way	NA	15	1	26% - 100%
		Illuma Tech	IPL06-10	3-Way	NA	7	1	9% - 100%
		Sureslide	6672-1L	single	NA	7	1	18% - 100%
		Sureslide	6674-PO	3-Way	NA	7	1	10% - 100%

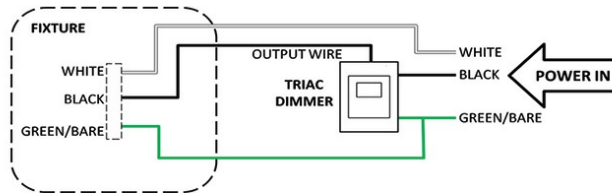

DIMENSIONS

Photometrics